

# PRO|SERIES™

HIGH PERFORMANCE FLATWORK IRONERS

## F08

F08048



CHROME CYLINDER —  
ELIMINATES MESSY WAX  
APPLICATION & STRIPPING;  
INCREASES PRODUCTIVITY

KINEMATIC™ PRESSURE  
IRONING SYSTEM —  
ENABLES SINGLE PASS  
IRONING WITHOUT  
DRYER CONDITIONING

COMPACT DESIGN  
WITH RETURN-TO-FEEDER  
CAPABILITY — INCREASES  
PRODUCTIVITY IN A SMALL  
SPACE WITH REDUCED  
LABOR EXPENSE

ELECTRO-MECHANICAL  
CONTROL — EASY-TO-USE

QUALITY COMPONENTS —  
5/3 YEAR WARRANTY

Designed to streamline laundry operations with unique features that ensure improved flexibility, heightened production and the highest-quality finishing standards, Continental's Pro-Series™ F08 Flatwork Ironers are ideal for small-volume laundry applications. F08 Ironers—with wax-less operation—properly finish damp linens without need for costly dryer conditioning.

**CONTINENTAL**  
GIRBAU, INC.

## SPECIFICATIONS

	F08048
Cylinder Diameter inch (mm)	8.7 (220)
Usable Cylinder Length inch (mm)	47.6 (1210)
Finishing Speed ft/min (m/min)	3.5-10 (1-3)
Shipping Weight lbs (kg)	662 (300)
Net Weight lbs (kg)	540 (245)
Height inch (mm)	42.8 (1088)
Width inch (mm)	67.3 (1709)
Depth inch (mm)	30.1 (765)
Exhaust Diameter inch (mm)	3.5 (90)
Exhaust Air Flow cfm (m <sup>3</sup> /h)	75 (128)
Motor Power Hp (CV)	0.35 (0.35)
Circuit Protection 208-240/60/3 Amps	25
Full Load Amps	21.1/20.3
Electric Heating Kw	7.2/8



The Kinematic™ strap tensioning system ensures optimum ironing quality (top). The ironing cylinder is made of machined-steel, mirror polished and finished in chrome (middle). The electro-mechanical control (bottom) on Pro-Series™ F08 Ironers is easy-to-use.

For more detailed information on product features and benefits, please request a "Discover the Difference" brochure from your local Continental distributor, or contact Continental Girbau, Inc. at 800-256-1073. For the most current technical specifications and architectural line drawings, please visit our website at: [www.cont-girbau.com](http://www.cont-girbau.com).



DISTRIBUTED BY:



800-256-1073  
[www.cont-girbau.com](http://www.cont-girbau.com)  
 2500 State Road 44 • Oshkosh, WI 54904  
 920-231-8222 • FAX 920-231-4666

# PRO|SERIES™

HIGH PERFORMANCE FLATWORK IRONERS

## F13

F13061

F13076



CHROME CYLINDER —  
ELIMINATES MESSY WAX  
APPLICATION & STRIPPING;  
INCREASES PRODUCTIVITY

AUTOSPEED® CONTROL —  
ELIMINATES TEMPERATURE  
FLUCTUATIONS; ENSURES  
CONSISTENT RESULTS

EXCLUSIVE MICROPROCESSOR  
CONTROL — ENHANCES  
EFFICIENCY & PRODUCTIVITY

QUICK CHECK™ SERVICE  
PACKAGE — ALLOWS EASY  
MAINTENANCE & TESTING  
FROM THE CONTROL PANEL

KINEMATIC™ PRESSURE  
IRONING SYSTEM — ENABLES  
SINGLE PASS IRONING WITH-  
OUT DRYER CONDITIONING

MAXIMUM THERMAL ISOLATION  
— ERGONOMICALLY FRIENDLY

QUALITY COMPONENTS —  
5/3 YEAR WARRANTY


Designed to streamline laundry operations with unique features that ensure improved flexibility, heightened production and the highest-quality finishing standards, Continental's Pro-Series™ F13 Flatwork Ironers are ideal for medium-volume laundry applications. Available in 61- and 76-inch widths and gas or electric models, F13 Ironers properly finish damp linens without need for costly dryer conditioning. The F13 features a 13-inch diameter roll and wax-less operation.

**CONTINENTAL**  
GIABAU, INC.

## SPECIFICATIONS

	F13061	F13076
<b>Cylinder Diameter</b> inch (mm)	12.8 (325)	12.8 (325)
<b>Usable Cylinder Length</b> inch (mm)	61 (1550)	76.4 (1940)
<b>Finishing Speed</b> ft/min (m/min)	3-16 (1-5)	3-16 (1-5)
<b>Shipping Weight</b> lbs (kg)	1333 (605)	1522 (690)
<b>Net Weight</b> lbs (kg)	992 (450)	1135 (515)
<b>Height</b> inch (mm)	51.9 (1319)	51.9 (1319)
<b>Width</b> inch (mm)	81.4 (2068)	96.7 (2456)
<b>Depth</b> inch (mm)	34.8 (885)	34.8 (885)
<b>Exhaust Diameter</b> inch (mm)	4.5 (114)	4.5 (114)
<b>Exhaust Air Flow</b> cfm (m <sup>3</sup> /h)	347 (590)	347 (590)
<b>Motor Power</b> Hp (CV)	0.67 (0.67)	0.67 (0.67)
<b>Circuit Protection</b>		
Electric 208-240/60/3 Amps	50	63
Gas 208-240/60/1 Amps	16	16
<b>Full Load</b> Amps	3.5	3.5
<b>Electric Heating</b> Kw	15.6	19.6
<b>Gas Heating</b> BTU/h (Kcal/h)	75600 (24000)	95500 (24090)
<b>Gas Supply</b>		
Natural inch wc	7 (±1)	7 (±1)
Propane inch wc	11 (±0.3)	11 (±0.3)

For more detailed information on product features and benefits, please request a "Discover the Difference" brochure from your local Continental distributor, or contact Continental Girbau, Inc. at 800-256-1073. For the most current technical specifications and architectural line drawings, please visit our website at: [www.cont-girbau.com](http://www.cont-girbau.com).

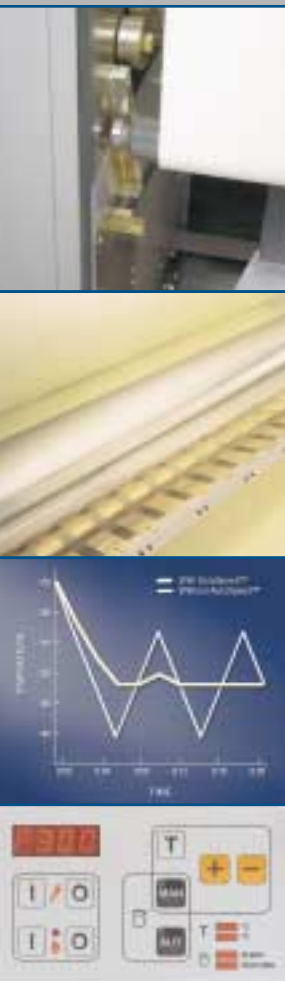

The Kinematic™ strap tensioning system ensures optimum ironing quality (top). The ironing cylinder is made of machined-steel, mirror polished and finished in chrome (upper-middle). Autospeed® automatically adjusts the ironing speed to assure a constant ironing temperature and even drying (lower-middle). The programmable microprocessor control (bottom) enables Pro-Series™ Ironers to be customized to match a variety of user needs.

DISTRIBUTED BY:



800-256-1073  
[www.cont-girbau.com](http://www.cont-girbau.com)  
 2500 State Road 44 • Oshkosh, WI 54904  
 920-231-8222 • FAX 920-231-4666

# PRO|SERIES™

High Performance Flatwork Ironers

## F20

F20058

F20100

F20075

F20125



Chrome Cylinder —  
Eliminates Messy Wax  
Application & Stripping;  
Increases Productivity

AutoSpeed® Control —  
Eliminates Temperature  
Fluctuations; Ensures  
Consistent Results

Exclusive Microprocessor  
Control — Enhances  
Efficiency & Productivity

Quick Check™ Service  
Package — Allows Easy  
Maintenance & Testing  
From The Control Panel

Kinematic™ Pressure  
Ironing System — Enables  
Single Pass Ironing with-  
out Dryer Conditioning

Maximum Thermal Isolation  
— Ergonomical ly Friendly

Integrated Folder Option  
— Increases Production,  
Quality & Labor Savings


Quality Components —  
5/3 Year Warranty

Continental Pro-Series™ F20 Flatwork Ironers are designed to streamline laundry operations with unique features that ensure improved flexibility, heightened production and the highest-quality finishing standards. Ideal for mid- to large-volume laundry applications, the 20-inch diameter roll ironer properly finishes damp linens without need for costly dryer conditioning. The F20 — in steam, gas or electric heat — is available in multiple finishing widths with optional integrated folding capability.

**CONTINENTAL**  
GIRBAU, INC.

## SPECIFICATIONS

	GAS/ELECTRIC				STEAM	
	F20058	F20075	F20100	F20125	F20075	F20125
Cylinder Diameter inch (mm)	20.1 (510)	20.1 (510)	20.1 (510)	20.1 (510)	20.1 (510)	20.1 (510)
Usable Cylinder Length inch (mm)	58.3 (1480)	74.8 (1900)	99.6 (2530)	124.6 (3165)	74.8 (1900)	124.6 (3165)
Finishing Speed ft/min (m/min)	3-21 (1-6.5)	3-21 (1-6.5)	3-21 (1-6.5)	3-21 (1-6.5)	3-21 (1-6.5)	3-21 (1-6.5)
Shipping Weight						
without folder lbs (kg)	2447 (1110)	2976 (1350)	3571 (1620)	4001 (1815)	3538 (1605)	5269 (2390)
with folder lbs (kg)	2646 (1200)	3219 (1460)	3902 (1770)	4409 (2000)	3792 (1720)	5666 (2570)
Net Weight						
without folder lbs (kg)	1962 (890)	2425 (1100)	2921 (1325)	3263 (1480)	2987 (1355)	4530 (2055)
with folder lbs (kg)	2138 (970)	2634 (1195)	3197 (1450)	3616 (1640)	3197 (1450)	4883 (2215)
Height inch (mm)	55.9 (1420)	55.9 (1420)	55.9 (1420)	55.9 (1420)	55.9 (1420)	55.9 (1420)
Width inch (mm)	85.4 (2170)	102.2 (2595)	127 (3225)	152 (3860)	104.9 (2665)	154.7 (3930)
Depth inch (mm)	45.8 (1164)	45.8 (1164)	45.8 (1164)	45.8 (1164)	45.8 (1164)	45.8 (1164)
Exhaust Diameter inch (mm)	5.1 (130)	5.1 (130)	5.1 (130)	5.1 (130)	5.1 (130)	5.1 (130)
Exhaust Air Flow cfm (m <sup>3</sup> /h)	497 (844)	497 (844)	497 (844)	497 (844)	497 (844)	497 (844)
Motor Power Hp (CV)	1.48 (1.48)	1.48 (1.48)	1.48 (1.48)	1.48 (1.48)	1.48 (1.48)	1.48 (1.48)
Circuit Protection						
Electric 208-240/60/3 Amps	100	125	160	200	—	—
Gas 208-240/60/3 Amps	13	13	13	13	—	—
Steam 208-240/60/3 Amps	—	—	—	—	13	13
Full Load Amps	11.3	11.3	11.3	11.3	11.3	11.3
Electric Heating Kw	28	35.5	47	60	—	—
Gas Heating BTU/h (Kcal/h)	111000 (28000)	143000 (35500)	186500 (47000)	238000 (60000)	—	—
Gas Supply						
Natural inch wc	7 (±1)	7 (±1)	7 (±1)	7 (±1)	—	—
Propane inch wc	11 (±0.3)	11 (±0.3)	11 (±0.3)	11 (±0.3)	—	—
Steam Heating BTU/h (Kcal/h)	—	—	—	—	166500 (42000)	277750 (70000)
Steam Consumption lbs/h (kg/h)	—	—	—	—	146 (66)	243 (110)
Steam Pressure psi (bar)	—	—	—	—	116 (8)	116 (8)
BHP Consumption BHP	—	—	—	—	4.97	8.3



The Kinematic™ strap tensioning system ensures optimum ironing quality (top). The ironing cylinder is made of machined-steel, mirror polished and finished in chrome (upper-middle). Autospeed™ automatically adjusts the ironing speed to assure a constant ironing temperature and even drying (lower-middle). The programmable microprocessor control (bottom) enables Pro-Series™ Ironers to be customized to match a variety of user needs.



For more detailed information on product features and benefits, please request a "Discover the Difference" brochure from your local Continental distributor, or contact Continental Girbau, Inc. at 800-256-1073. For the most current technical specifications and architectural line drawings, please visit our website at: [www.continentalgirbau.com](http://www.continentalgirbau.com).

DISTRIBUTED BY:



800-256-1073  
[www.continentalgirbau.com](http://www.continentalgirbau.com)  
 2500 State Road 44 • Oshkosh, WI 54904  
 920-231-8222 • FAX 920-231-4666